


NT 32-80



Note! Product picture may differ from actual product

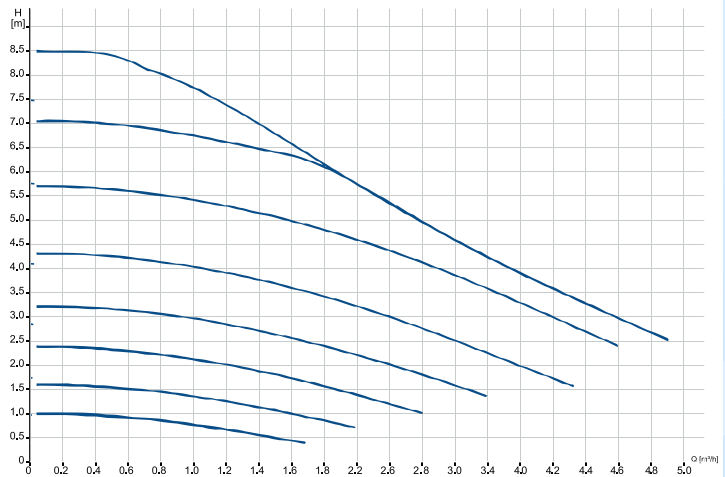

Description

Materials:	Value
Pump housing:	Cast iron
Pump housing:	EN 1561 EN-GJL-150

General information:	Value
Product name:	NT 32-80
Product No:	On request
EAN number:	On request

Technical:	Value
Maximum head:	95 dm
Pump head orientation:	9H
TF class:	110
Approvals:	CE, VDE
Model:	A

Installation:	Value
Range of ambient temperature:	2 .. 80 °C
Maximum operating pressure:	10 bar
Type of connection:	/PIPE THREAD
Size of connection:	25
Port-to-port length:	180 mm

Liquid:	Value
Pumped liquid:	Water
Liquid temperature range:	2 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m³

Others:	Value
Energy (EEI):	0.20
Net weight:	1.97 kg
Gross weight:	2.2 kg

Electrical data:	Value
P1 min.:	5 W
Max. P1:	95 W
Mains frequency:	50 / 60 Hz
Rated voltage:	1 x 230V V
Minimum current consumption:	0.04 A
Maximum current consumption:	0.84 A
Enclosure class (IEC 34-5):	IP44
Thermal protection:	Electrical

Dimensions

